

DOOR SECURITY

GENERAL HARDWARE

DOOR VIEWERS

DV



DV160

- Solid brass door viewer
- UL 20 minute fire rating for labelled fire doors
- Polished glass and acrylic optical lenses
- Individually boxed

MODEL	FINISH	DOOR THICKNESS	Ø BORE	FIRE RATING	VISION ANGLE	/BOX
DV160	26, 26D, 3	1 ³ / ₈ – 2 (35–51)	12mm	20 min	160°	25

IN (MM) 26: POLISHED CHROME 26D: SATIN CHROME 3: POLISHED BRASS



DV180, DV200

- Solid brass door viewer
- UL 20 minute fire rating for labelled fire doors
- Polished glass and acrylic optical lenses
- Individually boxed

MODEL	FINISH	DOOR THICKNESS	Ø BORE	FIRE RATING	VISION ANGLE	/BOX
DV180	26D	1 ³ / ₈ – 2 (35–51)	14mm	20 min	180°	25
DV200	26D	1 ³ / ₈ – 2 ¹ / ₄ (35–57)	14mm	20 min	200°	10


IN (MM) 26D: SATIN CHROME

DOOR VIEWER – LARGE

DS300



DS300CHR-COVER



- Zinc die cast door viewer
- Polished glass optical lens
- Viewer is intended for use with classified fire door rated up to and including 90 minutes
- Detachable lens cover is included
- Individually boxed
- Replacement lens cover: #DS300CHR-COVER

MODEL	FINISH	DOOR THICKNESS	Ø BORE	FIRE RATING	VISION ANGLE	/BOX
DS300	BP, CHR	1 ³ / ₈ – 2 (35–51)	3 ¹ / ₃₂ (24.5)	90 min	180°	15


IN (MM) BP: POLISHED BRASS CHR: CHROME

DOOR SECURITY

GENERAL HARDWARE

REVOLVING DOOR VIEWER

511



- Revolving door viewer
- Stamped brass components
- Crystal optical glass lenses
- Individually boxed


MODEL	FINISH	DOOR THICKNESS	Ø BORE	FIRE RATING	VISION ANGLE	/UNIT
511	-26D	1 ³ / ₈ – 1 ³ / ₄ (35–44)	2 ³ / ₈ (60.3)	—	140°	1

IN (MM) 26D: SATIN CHROME


DOOR SECURITY

GENERAL HARDWARE

DOOR GUARD



RH28SC



RH28EP28

- High security zinc alloy door guard, supplied with mounting screws
- Protective aluminum edge plates for door guard RH28EP, $\frac{9}{16} \times 1 \times 1\frac{3}{16}$ " (14.3 x 25.4 x 30 mm) sold separately

MODEL	FINISH	A	B	C	D	/BOX
RH28	SC	$4\frac{1}{4}$ (108)	$2\frac{7}{16}$ (62)	$1\frac{3}{16}$ (21)	$2\frac{5}{8}$ (67)	10

IN (MM) SC: SATIN CHROME

LATCH PROTECTORS



307




311P



311LP

- Unit covers the latch area of the door, thereby providing added protection from burglaries, vandalism or abuse
- For use with maximum $2\frac{1}{2}$ " (63.5 mm) diameter mortise or $3\frac{5}{8}$ " (92.1 mm) cylindrical lock
- Made of heavy gauge steel
- 311P and 311LP are supplied with security pin to prevent separation of the door and frame
- Individually packed and supplied with carriage bolts and nuts

#311BOLTKIT Bolt kit for exterior doors with weatherstripping

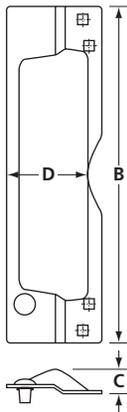

MODEL	FINISH	A	B	C	D	E	/CASE
307				—			
307S	28	7 (177.7)	3 (76.3)	$2\frac{3}{4}$ (70.0)	$\frac{9}{32}$ (7)	$\frac{3}{4}$ (19)	40
307L				$2\frac{9}{16}$ (65.0)			
311P				—			
311S	28	$10\frac{7}{8}$ (276.5)	$3\frac{3}{32}$ (78.2)	$2\frac{7}{8}$ (73.0)	$\frac{9}{32}$ (7)	$\frac{3}{4}$ (19)	40
311LP				$2\frac{5}{8}$ (67.0)			

IN (MM) 28: ALUMINUM PAINT

DOOR SECURITY

GENERAL HARDWARE

WRAP AROUND PLATES

WP4B, WP9B, WDC12B, WDCP12B



WP4




WP9



WDC12

- For cylindrical locks with 2 1/8" (54mm) bore hole
- For 1 3/4" (45mm) door thickness
- 22 gauge stainless steel
- Latch faceplate recess fits:
1 1/8 x 2 1/4" (28.5 x 57mm) latches
- Mounting screws included



MODEL	A	B	C	D	E	∅G
WP4BA-32D	4 1/2 (114.5)	4 (102)	1 3/4 (45)	—	2 3/8 (60)	2 1/8 (54)
WP4BB-32D		4 1/4 (108)			2 3/4 (70)	
WP9BA-32D	9 (229)	4 (102)	1 3/4 (45)	—	2 3/8 (60)	2 1/8 (54)
WP9BB-32D		4 1/4 (108)			2 3/4 (70)	
WDC12BA-32D	12 (305)	4 (102)	1 3/4 (45)	5 1/2 (140)	2 3/8 (60)	2 1/8 (54)
WDC12BB-32D		4 1/4 (108)			2 3/4 (70)	

IN (MM) 32D: SATIN STAINLESS STEEL