

BHMA
CERTIFIED

G1

UL
LISTED

3H

5
YEAR

- Certifications**
- Certified ANSI/BHMA A156.3, Grade 1
 - UL listed, Panic Exit
 - UL listed, up to 3hr Fire Exit
 - 5 Year limited warranty

- Rail Assembly**
- Steel rail assembly
 - Stainless steel assembly (32D finish)
 - Field sizable

- Handing**
- Non-handed

- Door Width**
- 30–38" (762–965 mm)
 - 36–48" (914–1219 mm) – option

- Door Height**
- Panic Exit: 120" (3048 mm) maximum
 - Fire Exit: 96" (2438 mm) maximum

- Door Thickness**
- 1 3/4" (45.5 mm)
 - 2 1/4" (57 mm) – available*

(* Requires #9500KB363, see Parts & Accessories

- Stile Width**
- 4 1/2" (114 mm) minimum
- Measured from door edge*

- Projection**
- 2 1/2" (64 mm) from door surface

- Latchbolt**
- Stainless steel, 3/4" (19 mm) throw

- Strike**
- 9500PR: Steel, standard type #9500AS239
 - 9500FR: Steel, standard type #9500AS245
- Other strikes available*

- Dogging**
- For Panic Exit models only
 - Hex key dogging
 - Cylinder dogging¹ – available
- (1) See 9500 Trims & Accessories*

- Mounting Hardware**
- Machine and wood screws
 - Sex nut & thru-bolts¹ – available
 - Glass bead shim kit – available

(1) Included with 9500FR. Required for non-reinforced hollow metal doors.

- Electrical Options**
- Electronic latch retraction – option
 - Alarm kit – available*
 - Request to exit – available*

(Sold separately, see 9500 Trims & Accessories*

- Trims**
- Lever, knob, pull, plate, escutcheon and handleset trims available

Sold separately, see 9500 Trims & Accessories

- Finish**
- 28–Aluminum, painted;
 - 32D–Satin Stainless Steel

Other finishes available by special order


9500PR	3	–	28
MODEL ¹	SIZE ¹		FINISH

(1) SEE SELECTION GUIDE

SELECTION GUIDE

MODEL		SIZE	DOOR WIDTH ¹	DOGGING	FINISH	/ CASE
9500PR	Panic Exit Hardware Rim device	3	30-38 (762-965)	●	28, 32D	4
		4	36-48 (914-1219)	●	28, 32D	4
9500FR	Fire Exit Hardware ² Rim device	3	30-38 (762-965)	—	28, 32D	4
		4	36-48 (914-1219)	—	28, 32D	4

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE EXIT LABELLED DOORS.

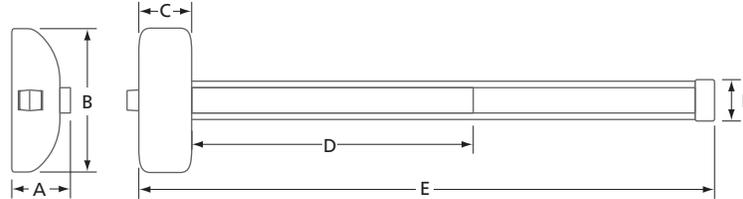

MODEL	A	B	C	D	E ¹	F
9500PR3 / FR3	2 1/2 (64)	7 11/16 (196)	2 11/16 (68)	21 13/16 (554)	32 1/2 (825)	2 1/8 (54)
9500PR4 / FR4				27 1/2 (699)	44 1/2 (1130)	

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS FOR DETAILS

PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.



9500ACPR
Main chassis cover for 9500PR.

9500ACFR
Main chassis cover for 9500FR.



9500KB357
Sex nut thru-bolt kit (6) for 1 3/4" (45.5mm) thick doors. Included with 9500FR.

9500KB363
Sex nut thru-bolt kit (6) for 2 1/4" (57mm) thick doors.



9500KG401
Glass bead shim kit for main chassis and end bracket.



9500AS200
Optional roller-type strike for 9500PR. Includes shim and mounting hardware.



9500AS239
Standard strike for 9500PR. Includes shim and mounting hardware.



9500AS245
Standard strike for 9500FR. Includes shim and mounting hardware.



9500AS251
Overlapping strike for double doors with paired panic exit devices, includes mounting hardware. Requires door coordinator (sold separately).



- Certifications**
- Certified ANSI/BHMA A156.3, Grade 1
 - UL listed, Panic Exit
 - UL listed, up to 3hr Fire Exit
 - 5 Year limited warranty

- Rail Assembly**
- Steel rail assembly
 - Stainless steel assembly (32D finish)
 - Field sizable
 - Less Bottom Rod models available

- Handing**
- Handed, field reversible

- Door Size**
- 30–38x84" (762–965x2134 mm)
 - 36–48x96" (914–1219x2438 mm) – option
- See Selection Guide for details.*

- Door Thickness**
- 1 3/4" (45.5 mm)
 - 2 1/4" (57 mm) – option*
- (*) Requires #9500KB363, see Parts & Accessories*

- Stile Width**
- 4 1/2" (114 mm) minimum
- Measured from door edge*

- Projection**
- 2 1/2" (64 mm) from door surface

- Vertical Rods**
- for 84" (2134 mm) door
 - for 96" (2438 mm) door – option
 - for 126" (3200 mm) panic door – available

- Latches**
- Top: stainless steel, deadlocking
 - Bottom: stainless steel

- Strikes**
- 9500PV/PL Top: steel, standard type #9500AS227
 - 9500PV Bottom: steel, standard type #9500AS221
 - 9500FV/FL Top: steel, standard type #9500AS245
 - 9500FV Bottom: steel, standard type #9500AS233
- Other strikes available*

- Dogging**
- For Panic Exit models only
 - Hex key dogging
 - Cylinder dogging¹ – available
- (1) See 9500 Trims & Accessories*

- Mounting Hardware**
- Machine and wood screws
 - Sex nut & thru-bolts¹ – available
 - Glass bead shim kit – available
- (1) Required for non-reinforced hollow metal doors. Included with Fire Exit models*

- Electrical Options**
- Electronic latch retraction – option
 - Alarm kit – available*
 - Request to exit – available*
- (*) Sold separately, see 9500 Trims & Accessories*

- Fire Latch**
- Auxiliary Fire Latch available, #9500AVFL
 - Included with 9500FL (Less Bottom Rod)

- Trims**
- Lever, knob, pull, plate, escutcheon and handleset trims available
- Sold separately, see 9500 Trims & Accessories*

- Finish**
- 19–Matte black, painted; 28–Aluminum, painted; 32D–Satin Stainless Steel
- Other finishes available by special order*


9500PV	37	LHR	–	28
MODEL ¹	SIZE ¹	HAND ²		FINISH

(1) SEE SELECTION GUIDE (2) LHR–LEFT HAND REVERSED, RHR – RIGHT HAND REVERSED

SELECTION GUIDE

MODEL		SIZE	DOOR SIZE ¹	DOGGING	FINISH	/ CASE
9500PV	Panic Exit Hardware Surface Vertical Rod	37	30–38x84 (965–914x2134)	●	28, 32D	4
		48	36–48x96 (914–1219x2438)	●	28, 32D	4
9500PL	Panic Exit Hardware Less Bottom Rod	37	30–38x84 (965–914x2134)	●	28, 32D	4
		48	36–48x96 (914–1219x2438)	●	28, 32D	4
9500FV	Fire Exit Hardware ² Surface Vertical Rod	37	30–38x84 (965–914x2134)	—	28, 32D	4
		48	36–48x96 (914–1219x2438)	—	28, 32D	4
9500FL	Fire Exit Hardware ² Less Bottom Rod	37	30–38x84 (965–914x2134)	—	28, 32D	4
		48	36–48x96 (914–1219x2438)	—	28, 32D	4

(1) RECOMMENDED DOOR SIZE, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE EXIT LABELLED DOORS.

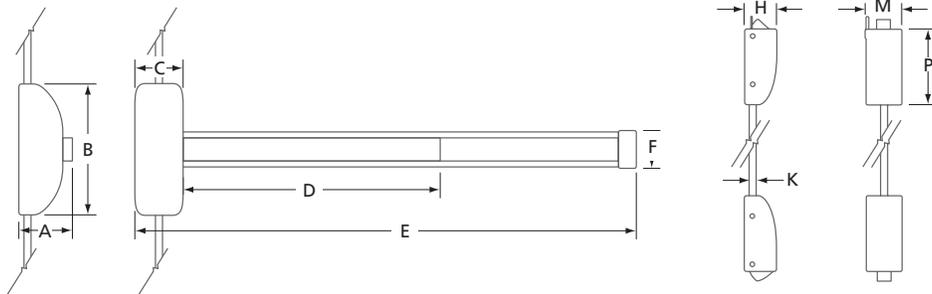

MODEL	A	B	C	D	E ²	F	H	K	M	P
9500PV / PL ¹ 37	2 1/2	7 11/16	2 11/16	21 19/16	32 1/2	2 1/8	2	∅ 1/2	2 1/8 (54)	3 15/16
9500FV / FL ¹ 37	(64)	(196)	(68)	(554)	(825)	(54)	(51)	(12.7)	2 5/8 (67)	100
9500PV / PL ¹ 48	2 1/2	7 11/16	2 11/16	27 1/2	44 1/2	2 1/8	2	∅ 1/2	2 1/8 (54)	3 15/16
9500FV / FL ¹ 48	(64)	(196)	(68)	(699)	(1130)	(54)	(51)	(12.7)	2 5/8 (67)	100

IN(MM) (1) 9500PL/FL MODEL DOES NOT INCLUDE BOTTOM ROD AND BOTTOM LATCH (2) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.



9500ACPV
Main chassis cover for 9500PV.



9500ACFV
Main chassis cover for 9500FV / FL.

9500AVFB
Bottom latch case for 9500FV.

9500AVFT
Top latch case for 9500FV / FL

9500AVPB
Bottom latch case for 9500PV.

9500AVPT
Top latch case for 9500PV.



9500AT96
Top rod for 96" (2438 mm) tall door.

9500AT126
Top rod for non-fire 126" (3200 mm) tall door.

9500ABR
Replacement bottom rod.

9500AG
Replacement vertical rod guide.



9500KG406
Glass bead shim kit for 9500PV exit device.

9500KG412
Glass bead shim kit for 9500FV / FL exit device.



9500AS221
Bottom strike for 9500PV exit device.



9500AS227
Top strike for 9500PV exit device.



9500AS233
Bottom strike for 9500FV. Includes mounting hardware. Included with 9500FV.



9500AS245
Top strike for 9500FV / FL. Includes shim and mounting hardware.



9500AVFL
Auxiliary fire latch. Includes mounting hardware. Included with 9500FL.




9500KB369
Sex nut thru-bolt kit (14) for 1 3/4" (45.5 mm) thick doors. Included with 9500FV / FL.



9500KB375
Sex nut thru-bolt kit (14) for 2 1/4" (57 mm) thick doors.


9500TT HANDLESET TRIM

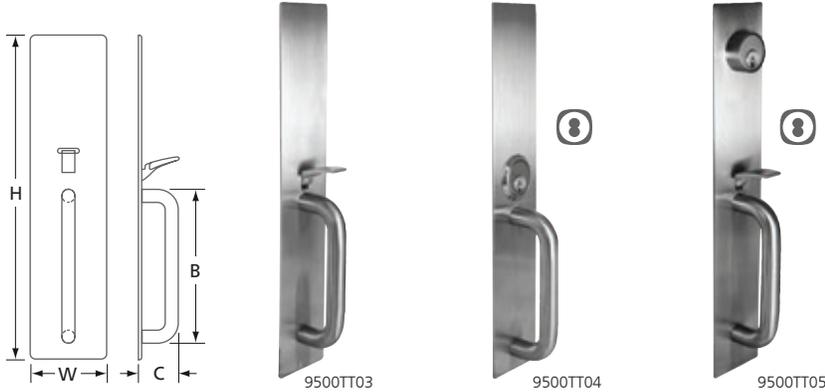

Model	9500TT03	9500TT04	9500TT05
Function	Passage (#3)	Storeroom (#4) ←	Entrance (#5) ←
Finish	28, 32D	28, 32D	28, 32D
Cylinder ¹	—	Rim ²	Mortise ²
Plate (HxW)	14 1/2 x 2 5/8 (368 x 67)	14 1/2 x 2 5/8 (368 x 67)	14 1/2 x 2 5/8 (368 x 67)
Pull (B)	6 1/8 (156)	6 1/8 (156)	6 1/8 (156)
Projection (C)	2 1/8 (54)	2 1/8 (54)	2 1/8 (54)
Door Thickness	1 3/4 (44.5)*	1 3/4 (44.5)*	1 3/4 (44.5)*
Warranty	1 Year limited	1 Year limited	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS INCLUDED – KEYING SERVICES AVAILABLE (2) SFIC MODEL AVAILABLE, CORE SOLD SEPARATELY
 (*) 2 1/4IN (57MM) DOOR KIT AVAILABLE #9500KE225-TT

9500TK/TL TRIM STYLES

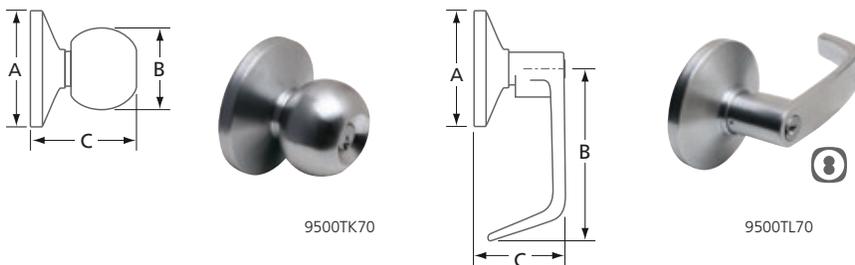

Trim	9500TK	9500TL
Available Functions ¹	10 Passage 70 Classroom ← 80 Storeroom ←	10 Passage 70 Classroom ← ² 80 Storeroom ← ²
Finish	26D	26D
Rose (A)	3 3/8 (86)	3 3/8 (86)
Length (B)	ø 2 1/4 (57)	4 7/16 (113)
Projection (C)	2 3/4 (70)	2 9/16 (65)
Door Thickness	1 3/4 (44.5)	1 3/4 (44.5)
Warranty	1 Year limited	1 Year limited

IN (MM) (1) KEYED FUNCTIONS INCLUDE: SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS – KEYING SERVICES AVAILABLE (2) SFIC MODEL AVAILABLE, CORE SOLD SEPARATELY

9500 SERIES

EXIT DEVICE TRIMS & ACCESSORIES

DOREX®

9500TE ESCUTCHEON TRIM



Model	9500TE10	9500TE70	9500TE80
Function	Passage	Classroom	Storeroom
Finish	26D, 28	26D, 28	26D, 28
Lever	Straight return	Straight return	Straight return
Cylinder ¹	—	Mortise ²	Mortise ²
Escutcheon (H x W)	8 3/16 x 2 1/2 (224 x 64)	8 3/16 x 2 1/2 (224 x 64)	8 3/16 x 2 1/2 (224 x 64)
Lever (B)	4 5/8 (118)	4 5/8 (118)	4 5/8 (118)
Projection (C)	2 3/8 (60)	2 3/8 (60)	2 3/8 (60)
Door Thickness	1 3/4 (44.5)*	1 3/4 (44.5)*	1 3/4 (44.5)*
Warranty	1 Year limited	1 Year limited	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS INCLUDED – KEYING SERVICES AVAILABLE (2) SFIC MODEL AVAILABLE, CORE SOLD SEPARATELY
 (*) 2 1/4IN (57 MM) DOOR KIT AVAILABLE #9500KE225-TE

PULLS & PLATES



Trim	9500TPEP	9500TPDT	9500TPNL
Finish	28-Aluminum, painted	28-Aluminum, painted	28-Aluminum, painted
Function	Blank plate (#1)	Dummy pull (#2)	Night latch (#4) ➔
Cylinder	—	—	Rim ¹
Projection (B)	—	1¼(32)	1¼(32)
Plate (HxW)	5½x3 (144x76)	7½x3 (198x76)	7½x3 (198x76)
Door Thickness	1¾ (44.5)	1¾ (44.5)	1¾ (44.5)

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS INCLUDED – KEYING SERVICES AVAILABLE; SFIC MODEL AVAILABLE, CORE SOLD SEPARATELY

9500KB363

OTHER ACCESSORIES



9500KA
Push pad alarm kit for 9500 exit devices.
#9500KA36 for 36" (914mm) models.
#9500KA48 for 48" (1219mm) models.



9500KD
Cylinder dogging kit for 9500 Panic Exit devices only.
#9500KD36 for size 36" (914mm) models.
#9500KD48 for size 48" (1219mm) models.

9500KE225-TE
9500TE Extension kit for 2¼" (57mm) door
9500KE225-TT
9500TT Extension kit for 2¼" (57mm) door



9500KSRX
Push pad request to exit switch kit.
Requires rail modification—please contact.

