



- Type** • Cylindrical lock
- Certifications**
 - Conforms to ANSI/NHMA A156.2, Series 4000, Grade 1
 - UL listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - Meets ADA requirements
 - 10 Year limited warranty
- Door Thickness**
 - 1 $\frac{3}{8}$ –2" (35–51mm)
 - SFIC Models: 1 $\frac{9}{16}$ –2" (40–51mm)
- Handing** • Non handed
- Backset**
 - 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
 - 3 $\frac{3}{4}$ " (95 mm) – available
 - 5" (127 mm) – available
- Spring Latch**
 - Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
 - Deadlatch, $\frac{3}{4}$ " (19 mm) throw – available
- Faceplate**
 - Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
 - Solid, pressure cast lever
 - Brass rose
 - Rose diameter: 3 $\frac{9}{16}$ " (90 mm)
- Chassis**
 - Concealed mounting plate and screws
 - Fixed security posts
 - Lever clutch release
- Preparation**
 - Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)
- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*
- Functions**

10 Passage	70 Classroom
17 Dummy, single	75 Classroom security
42 Privacy	80 Storeroom
53 Entry	82 Institution
- Lever Styles** L–Standard return
- Finish** 26D–Satin chrome, 19–Matte black
Other finishes available by special order

GX1L 53 - 26D


SERIES FUNCTION FINISH


SELECTION GUIDE

SERIES	FUNCTION	FINISH ¹	/CASE
GX1 L	10 Passage	26D, 19	6
GX1 L	17 Dummy, single	26D, 19	6
GX1 L	42 Privacy	26D, 19	6
GX1 L	53 Entry ↔	26D, 19	6
GX1 L	53IC Entry SFIC, less core ↔	26D, 19	6
GX1 L	70 Classroom ↔	26D, 19	6
GX1 L	70IC Classroom SFIC, less core ↔	26D, 19	6
GX1 L	75 Classroom security ↔	26D	6
GX1 L	80 Storeroom ↔	26D, 19	6
GX1 L	80IC Storeroom SFIC, less core ↔	26D, 19	6
GX1 L	82 Institution / utility ↔	26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

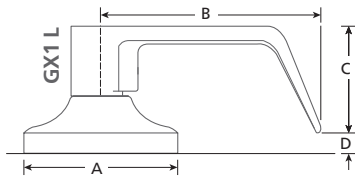

	A	B	C	D*
GX1 L 	3 ⁹ / ₁₆ (90)	5 (127)	2 ⁵ / ₈ (66.7)	3 ³ / ₈ (10)

IN (MM) (*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106
T-Strike, square corners:
1¹/₈x2³/₄" (28.5x70 mm)

9106NH
T-Strike, no hole; square corners:
1¹/₈x2³/₄" (28.5x70 mm)



ASA-T
ASA strike with adjustable tab
ASANH
ASA strike, no hole



9806
CX5 high security SFIC core, 6 pin, 0 bitted
9807
CX5 high security SFIC core, 7 pin, 0 bitted
CBI-BF7KD-26D
BEST® F type SFIC core, 7 pin, keyed different



GX1SL238
Passage latch: 2³/₈" (60 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1SL234
Passage latch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1PL238
Privacy latch: 2³/₈" (60 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1PL234
Privacy latch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1DL238
Deadlatch: 2³/₈" (60) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1DL234
Deadlatch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1DL234-34
Deadlatch: 2³/₄" (70 mm) backset, 3¹/₄" (19 mm) throw, 1¹/₈x2¹/₄" (28.5x57 mm) faceplate
For use in double door or electric strike applications



GX1LE334
Backset extension to 3³/₄" (95 mm); use with 2³/₈" (60 mm) backset latch

GX1LE500
Backset extension to 5" (127 mm); use with 2³/₄" (70 mm) backset latch