


# G1B SERIES

## COMMERCIAL LOCK

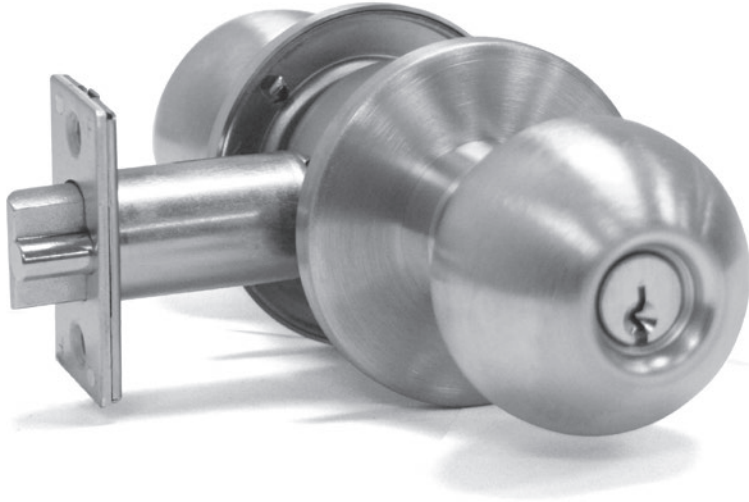

- Type** • Cylindrical lock
- Certifications**
  - Conforms to ANSI/BHMA A156.2, Series 4000, Grade 1
  - UL listed, 3hr fire-rating
  - 5 Year limited warranty
- Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)
- Handing** • Non handed
- Backset** • 2 $\frac{3}{4}$ " (70 mm)
- Spring Latch** • Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw
- Faceplate**
  - Mortise type, square corners
  - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
  - Stainless steel knob
  - Stainless steel rose
  - Rose diameter: 2 $\frac{3}{4}$ " (68 mm)

- Chassis**
  - Concealed mounting plate and screws
  - Removable security posts
- Preparation**
  - Fits ANSI A115.2 161 door prep
  - Cross bore: 2 $\frac{1}{8}$ " (54 mm)
  - Edge bore: 1" (25.4 mm)
- Cylinder**
  - Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
  - Removable, rekeyable
  - Small format interchangeable core (SFIC) model – available\*

*Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*

<b>Functions</b>	10 Passage	70 Classroom
	40 Privacy	80 Storeroom
	53 Entry	82 Institution

**Finish** 26D–Satin chrome  
*Other finishes available by special order*


<b>G1B</b>	<b>53</b>	<b>-</b>	<b>26D</b>
SERIES	FUNCTION		FINISH

## SELECTION GUIDE

SERIES	FUNCTION	FINISH <sup>1</sup>	/CASE
G1B	10 Passage	26D	10
G1B	40 Privacy	26D	10
G1B	53 Entry ↔	26D	10
G1B	53IC Entry SFIC, less core ↔	26D	10
G1B	70 Classroom ↔	26D	10
G1B	70IC Classroom SFIC, less core ↔	26D	10
G1B	80 Storeroom ↔	26D	10
G1B	80IC Storeroom SFIC, less core ↔	26D	10
G1B	82 Institution ↔	26D	10

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

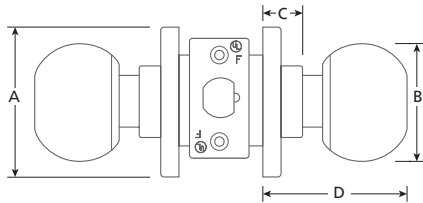

	A	B	C	D*
<b>G1B</b> (5)	2¾ (68)	2⅜ (55)	¾ (19)	2⅛ (75)

IN (MM) (\*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**STRIKE-T**  
T-Strike, square corners:  
1½x2¾" (28.5x70 mm)



**G1SL234**  
Passage latch: 2¾" (70 mm) backset  
1½x2¼" (28.5x57 mm) faceplate



**ASA-T**  
ASA strike with adjustable tab



**G1DL234**  
Deadlatch: 2¾" (70 mm) backset  
1½x2¼" (28.5x57 mm) faceplate



**9806**  
CX5 high security SFIC core, 6 pin, 0 bitted

**9807**  
CX5 high security SFIC core, 7 pin, 0 bitted

**CBI-BF7KD-26D**  
BEST® F type SFIC core, 7 pin, keyed different